

Volumetric Data Registration

Leonid I. Dimitrov and Miloš Šrámek
Commission for Scientific Visualization
Austrian Academy of Sciences

ViscomÖAW

4/10/00
1


What Is It All About?

- Different modalities provide us with complementary information.
- Combination of those enhances the possibilities for interpretation.
- There is an ever-increasing need for accuracy and speed.
- Registration is NOT fusion!!!

ViscomÖAW

4/10/00
2

An Example: SPGR+T2

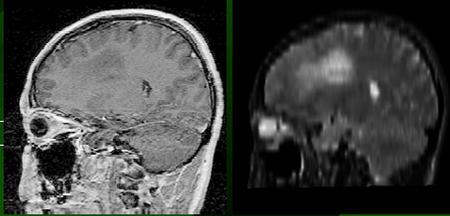


SPGR

T2

ViscomÖAW

4/10/00
3


3D-Reconstructions

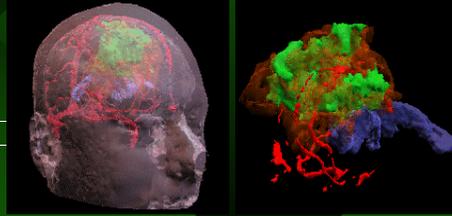

ViscomÖAW

4/10/00
4

Another Example: MRI+SPECT

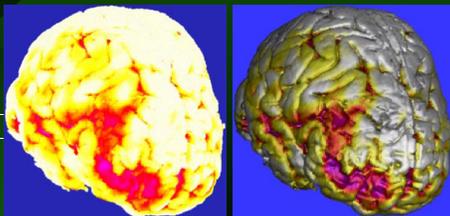

ViscomÖAW

4/10/00
5

Informal Statement of the Problem

Develop a method which **transforms** geometrically the point samples of one data set to the point samples of another one in such a way that they **fit** together **optimally**.

ViscomÖAW

4/10/00
6

Identification of the Involved Subproblems

- Matching Transformation
 - Correlation
 - Alignment
- (Dis)similarity Function
 - Misregistration
 - Cost
- Optimization Task

Viscom/ÖAW 4/10/00 7

Overview of Registration Methods

- Classification according to different criteria:
 - What is to be registered?
 - How is it to be registered?
 - When is it to be registered?
 - Why is it to be registered?

Viscom/ÖAW 4/10/00 8

What?

- Inter- vs. Intra-modality
- Inter- vs. Intra-subject
- Image-to-atlas
- 2D vs. 3D

Viscom/ÖAW 4/10/00 9

How?

- Rigid – affine – non-linear
- Extrinsic – intrinsic
- Points – lines – surfaces – voxels
- Interactive – semi-automatic – automatic

Viscom/ÖAW 4/10/00 10

When?

- Prospective
- Realtime
- Retrospective

Viscom/ÖAW 4/10/00 11

Why?

- Diagnostics
- Treatment planning
- Image-guided surgery
- Treatment evaluation

Viscom/ÖAW 4/10/00 12

Popular Methods

- Stereotactic frame
- Fiducial marks
- Principal axes
- Atlas-oriented
- Surface similarity
- Voxel-based

Viscom/ÖAW

4/10/00
13

Formal Statement of the Problem

- Definitions:

Let

$$\mathbf{M} = \{f_m \mid \text{is localizable model feature}\}$$

and

$$\mathbf{O} = \{f_o \mid \text{is localizable object feature}\}$$

be model resp. object.

Viscom/ÖAW

4/10/00
14

Find a *matching transformation*

$$\tau : \mathbb{R}^3 \rightarrow \mathbb{R}^3$$

specified by a *parameter vector*

$$v \in \mathbf{M} \subset \mathbb{R}^3$$

where

$$\mathbf{M} = \{v \in \mathbb{R}^k : r_0^{\min} \leq v_0 \leq r_0^{\max}, \dots, r_k^{\min} \leq v_k \leq r_k^{\max}\}$$

is the *feasible region*

Viscom/ÖAW

4/10/00
15

such that a *cost function*

$$C : \mathbb{R}^k \rightarrow \mathbb{R}$$

takes its *optimum* in

$$v_{opt} = \arg \min \{C(v) \mid v \in \mathbf{M}\}$$

Viscom/ÖAW

4/10/00
16

Matching Transformations

- Rigid-body transformations
 - Translations
 - Rotations
 - Scalings
- Affine transformations
 - Reflexion
 - Stretch
 - Skew
- Non-linear transformations

Viscom/ÖAW

4/10/00
17

Rigid-body Transformations

- Translation:

$$T_v = \begin{pmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ d_x & d_y & d_z & 1 \end{pmatrix}$$

- Rotation:

$$R_\alpha = \begin{pmatrix} 1 & 0 & 0 & 0 \\ 0 & \cos \alpha & \sin \alpha & 0 \\ 0 & -\sin \alpha & \cos \alpha & 0 \\ d_x & d_y & d_z & 1 \end{pmatrix}$$

- Scaling:

$$S = \begin{pmatrix} s_x & 0 & 0 & 0 \\ 0 & s_y & 0 & 0 \\ 0 & 0 & s_z & 0 \\ 0 & 0 & 0 & 1 \end{pmatrix}$$

Viscom/ÖAW

4/10/00
18

Combined Transformation

The transformation τ mediated by

$$T = T_o \circ S_o \circ T_d \circ R_x \circ R_y \circ R_z \circ S_r \circ T_r$$

transforms an object point to a model point

$$\tau(P_o) = P_m = P_o \circ T$$

Viscom ÖAW 4/10/00 19

Affine Transformations

- General form:

$$T = \begin{pmatrix} a_{00} & a_{01} & a_{02} & 0 \\ a_{10} & a_{11} & a_{12} & 0 \\ a_{20} & a_{21} & a_{22} & 0 \\ a_{30} & a_{31} & a_{32} & 1 \end{pmatrix}$$

Viscom ÖAW 4/10/00 20

Non-linear Transformations

- Polynomial form:

$$\begin{cases} x_m = \sum_{p=0}^n \sum_{q=0}^n \sum_{r=0}^n a_{pqr} x_o^p y_o^q z_o^r \\ y_m = \sum_{p=0}^n \sum_{q=0}^n \sum_{r=0}^n b_{pqr} x_o^p y_o^q z_o^r \\ z_m = \sum_{p=0}^n \sum_{q=0}^n \sum_{r=0}^n c_{pqr} x_o^p y_o^q z_o^r \end{cases}$$

Viscom ÖAW 4/10/00 21

Transformations Summary

- Geometrical point transformations are the tool of registration
- There are different classes of them variously suited to different registration contexts
- Goal of the registration process is to find the best suited one

Viscom ÖAW 4/10/00 22

Cost Functions

- Surface-based
 - Employ spatial information
- Grayvalue-based
 - Employ histogram information

Viscom ÖAW 4/10/00 23

Desirable Properties of Cost Functions

- Continuous on the feasible region
- Invariant to imaging conditions and object positioning
- Global minimum determines anatomical optimum

Viscom ÖAW 4/10/00 24

Surface-based Cost Functions

- Features are surface points
- Euclidean distance of a point P to the model M :

$$d(P) = \min_{R \in M} \|P - R\|$$

- Surface similarity measure:

$$C(v) = \sum_{i=1}^N d^2(\tau_v(P_i))$$

Viscom/ÖAW

4/10/00
25


Digital Distance Transforms

- Binary image filter
- Labels voxels with their distance to objects
- Several types:
 - Euclidean
 - Chamfer
 - Chessboard
 - Cityblock

Viscom/ÖAW

4/10/00
26

An Image with Distance Transform Applied

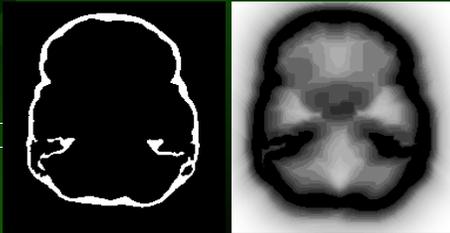

Viscom/ÖAW

4/10/00
27

Grayvalue-based Similarity Functions

- Cross-correlation
 - Multiplicative
 - Subtractive
- Scatter-plot based
 - Histogram moments
 - Information entropy
 - Mutual information

Viscom/ÖAW

4/10/00
28

Multiplicative Cross-correlation

- Defined as

$$C(v) = \frac{\sum_{i=1}^N g_m(\tau_v(P_i)) \cdot g_o(P_i)}{\sqrt{\sum_{i=1}^N g_m^2(\tau_v(P_i))} \cdot \sqrt{\sum_{i=1}^N g_o^2(P_i)}}$$

- where g_m, g_o are model resp. object grayvalues.

Viscom/ÖAW

4/10/00
29

Subtractive Cross-correlation

- Absolute differences instead of products:

$$C(v) = \frac{\sum_{i=1}^N |g_m(\tau_v(P_i)) - g_o(P_i)|}{\sqrt{\sum_{i=1}^N g_m^2(\tau_v(P_i))} + \sqrt{\sum_{i=1}^N g_o^2(P_i)}}$$

Viscom/ÖAW

4/10/00
30

Feature-space Histogram or Scatter-plot

- Maps the set of ordered grayvalue pairs into a set of counts:

$$S: G_o \times G_m \rightarrow G_s \subset \mathbb{N}$$


- Each value (scatter-plot pixel) represents the number of such ordered pairs:

$$S_i(g_o, g_m) = |\{(g_o(P), g_m(\tau(P)))\}|$$

ViscomÖAW

4/10/00
31


Scatter-plot: One Object



ViscomÖAW

4/10/00
32

Scatter-plot: Two Objects



ViscomÖAW

4/10/00
33

Scatter-plot Histogram

- Joint probabilities:

$$P(g_o, g_m) = P(\{g_o, g_m\}) = \frac{S_i(g_o, g_m)}{N}$$

- 1D Scatter-plot histogram: $h(p_i)$

ViscomÖAW

4/10/00
34

Scatter-plot Histogram Moments

- Third-order moments:

$$C(v) = - \sum_{i=1}^l h(p_i) \cdot p_i^3$$

- Normalized version:

$$C(v) = - \frac{\sum_{i=1}^l h(p_i) \cdot p_i^3}{\sum_{i=1}^l h(p_i)}$$

ViscomÖAW

4/10/00
35

Scatter-plot Histogram Entropy

- Information entropy is the amount of uncertainty in a probability distribution

$$H(X) = H(p_1, \dots, p_l) = - \sum_{i=1}^l p_i \cdot \log(p_i)$$

- Information entropy cost function:

$$C(v) = - \sum_{g_i \in G_o} \sum_{g_j \in G_m} P(g_i, g_j) \log(P(g_i, g_j))$$

ViscomÖAW

4/10/00
36

Mutual Information

- Generalized mutual dependence:

$$C(v) = - \sum_{g_i \in G_o} \sum_{g_j \in G_m} P(g_i, g_j) \log \frac{P(g_i, g_j)}{P(g_i)P(g_j)}$$

- Mutual information in terms of entropies:

$$C(v) = H(g_o) + H(g_m) - H(g_o, g_m)$$

Viscom/ÖAW

4/10/00
37

Similarity Functions Summary

- The quality of registration is measured by similarity functions
- The registration process searches a function parameter space for an optimal solution
- There is a great diversity of them
- They are subject of active research

Viscom/ÖAW

4/10/00
38

Optimization Task

- The problem is
 - Multivariate
 - Continuous
 - Non-linear
 - Constrained
- Solution: numerical algorithms

Viscom/ÖAW

4/10/00
39

Optimization Methods

- Exhaustive search
- Gradient-based
- Simulated annealing
- Genetic algorithms

Viscom/ÖAW

4/10/00
40

Exhaustive search

- $N \times N \times N$ model
- Possibilities for object position: $O(N^3)$
- Possible (discrete) angle triples: $O(N^3)$
- Search space for rigid-body transformations: $O(N^6)$
- For $N = 256 \Rightarrow \approx 10^{14} \Rightarrow$ ES infeasible!!!

Viscom/ÖAW

4/10/00
41

Gradient-based Optimization

- Hill-climbing techniques
- Generally deterministic
- Susceptible to local minima
- Alternative: genetic algorithms

Viscom/ÖAW

4/10/00
42

Simulated Annealing

- Probabilistic hill-climbing technique
- Based on thermodynamical processes
- Boltzmann's distribution: $P(s) = e^{\frac{-E(s)}{k_B T}}$
- Better suited for situations with many local minima and one global optimum

Viscom/OAW

4/10/00
43

Optimization Summary

- The registration process is generally formulated as an optimization task
- It can't be solved in general by simple methods due to its complexity
- Numerical iterative approximation algorithms are used instead
- Simulated-annealing and genetic algorithms are among the most promising ones

Viscom/OAW

4/10/00
44

Movie demonstration of different techniques



Viscom/OAW

4/10/00
45

Conclusions

- There is no ideal registration method for medical volumetric data
- Feature-based methods can hardly be automated
- Scatter-plot methods do not take into account spatial information
- A cross-metrics hybrid approach combined with anatomical knowledge may be the solution

Viscom/OAW

4/10/00
46

References

- JBA Maintz and MA Viergever (1998)
A survey of medical image registration.
Medical Image Analysis 2(1), 1-36.
- LG Brown (1992)
A survey of image registration techniques.
ACM Computing Surveys 24(4), 325-376.
- PJM van Laarhoven and EHJ Aarts (1987)
Simulated Annealing: Theory and Applications.
Series: Mathematics and its Applications, D.
Reidel Publishing company, Dordrecht.
- <http://www.iinform/oeaw.ac.at/~leon/regist.pdf>

Viscom/OAW

4/10/00
47